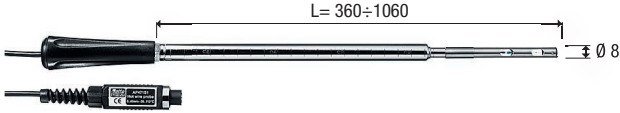

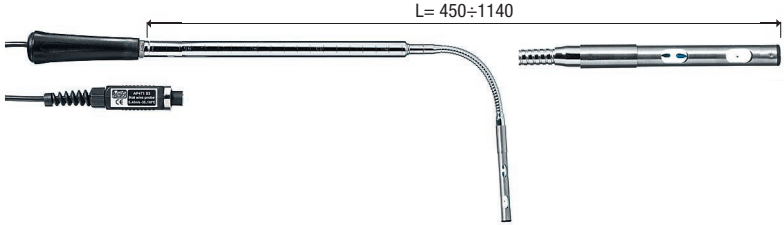
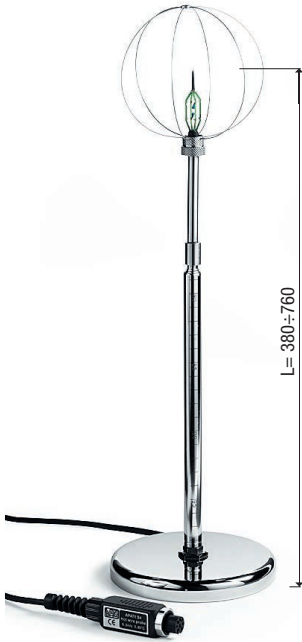
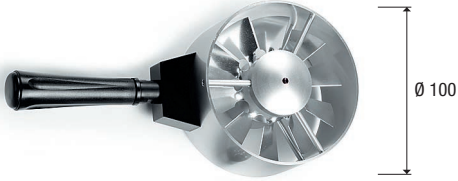









AIR SPEED PROBES WITH SICRAM MODULE FOR PORTABLE INSTRUMENTS

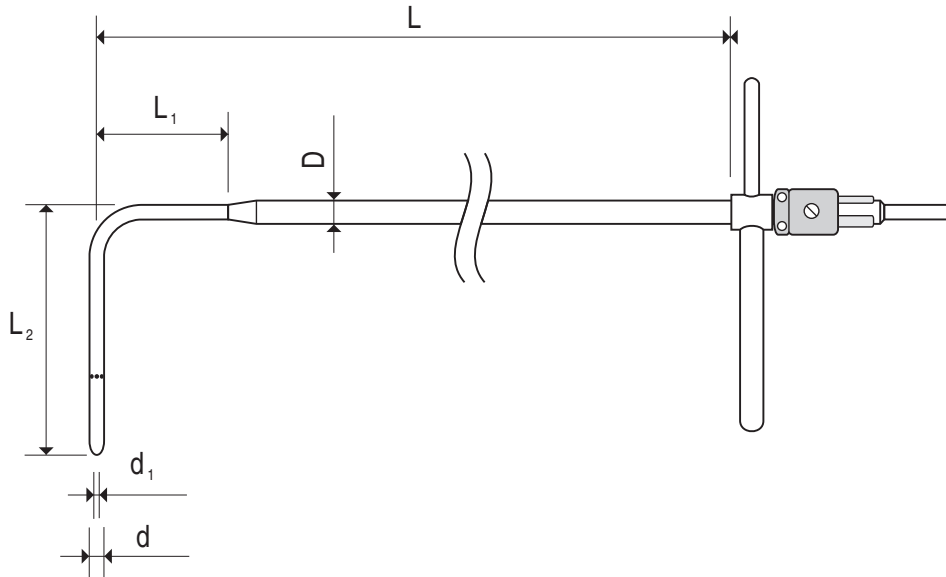
Code	Range m/s	Range Temp. °C	
HOT-WIRE			
AP471S1	0.1÷40	-25÷80	
AP471S2	0.1÷5		
AP471S3	0.1÷40		
AP471S4	0.1÷5	0÷80	
VANE			
AP472S1	0.6÷25	-25÷80	
AP472S2	0.5÷20		
AST1	Telescopic shaft min. length 220 mm Telescopic shaft max. length 870 mm		

MODULES FOR PITOT TUBES

Code	Range Press. Diff. mbar	Range Speed m/s	
AP473S1	10 f.s.	2÷40	
AP473S2	20 f.s.	2÷55	
AP473S3	50 f.s.	2÷90	
AP473S4	100 f.s.	2÷130	
PW	Connection cable between module AP473S... and Pitot tube provided with TC		

PITOT TUBES

Stainless steel Pitot tubes to measure air speed and temperature for models provided with 'K' thermocouple. They can be connected to the SICRAM modules AP473S1, AP473S2, AP473S3, AP473S4 and to the instruments HD2114P... and HD2134P...



	d mm	d ₁ mm	D mm	L mm	L ₁ mm	L ₂ mm	Temp. °C	Thermocouple K	Material
T1-300	3	1	6	300	30	72	0...600°C	---	AISI 316
T2-400	5	2	8	400	45	120		---	
T2-600	5	2	8	600	45	120		---	
T3-500	8	3.2	8	500	---	192		---	
T3-800	8	3.2	8	800	---	192		---	
T3-800TC	8	3.2	8	800	---	192		TC	
T4-500	10	4.0	10	500	---	240		---	
T4-800	10	4.0	10	800	---	240		---	
T4-800TC	10	4.0	10	800	---	240		TC	
T4-1000	10	4.0	10	1000	---	240		---	
T4-1000TC	10	4.0	10	1000	---	240		TC	