

Spectrally Flat Class B Pyranometer

LPPYRA02

○ ACCORDING TO THE STANDARD

Follows recommendations of the WMO
fully compliant with ISO 9060:2018

○ GREAT FLEXIBILITY

Wide availability of standard output signals
for **easy integration** in any installation

○ EASY TO SET UP AND QUICK TO INSTALL


Rugged housing with low temperature response
Integrated **levelling device** for perfect positioning

○ ACCURATE AND RELIABLE SYSTEM

High reliability - extended warranties
Individual Calibration Reports for each instrument

○ HIGH IMMUNITY AGAINST INTERFERENCE

Protected against overpower and **fully electrically isolated** from any mounting surface

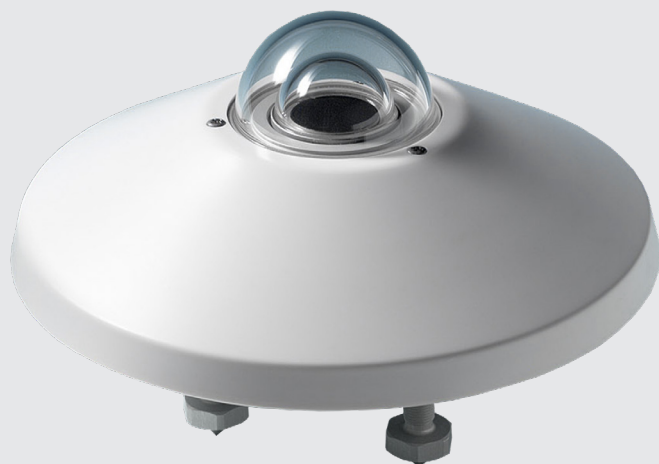

Main Applications

PV monitoring
Solar energy
Meteorology
Agriculture

Measuring solar efficiency – highly accurate

The **LPPYRA02** series has been designed to provide a very highly **stable and accurate** solution for measuring solar and to be used for research studies.

The pyranometers in this series are all based on the **thermopile principle, very precise**. This principle provides a μV signal without the need of an external power supply. To be able to transfer the signal over a longer distance and to prevent interference, mostly types are equipped with an integrated transmitter. When using a 4-20 mA, 0-10 VDC or RS485 Modbus-RTU output, an external active power supply is necessary. The output of these series is always related to W/m^2 .

All our pyranometers are made in a way that the electrical system is totally isolated from the housing, making it possible to mount the pyranometer on any surface, including metal ones, without the need of isolation.

Delta OHM is one of the main pyranometer producers worldwide. We produce a full range of pyranometers according to the **ISO 9060: 2018 - Spectrally Flat Class A, B and C**.


Each of our pyranometers is **calibrated separately** during production; all are supplied standard with a Report of Calibration in accordance with the ISO 9847:1992. Next to this, we are the only pyranometer producer that has invested in a full range of 6 accredited ISO 17025 Calibration Laboratories.

Pyranometers can be used **as stand-alone or in combination with our weather stations**. Delta OHM provides a full range of data loggers with integrated GSM/3G/4G modem to read and transfer measured data to any database or Cloud solution.

Technical Specifications

Sensor	Thermopile
Typical Sensitivity	6 ÷ 12 µV/Wm ⁻²
Impedance	33 ÷ 45 Ω
Measuring range	0 ÷ 2000 / 4000 W/m ²
Viewing angle	2π sr
Spectral range (50%)	283 ÷ 2800 nm
Operating temperature/ humidity	-40 ÷ 80 °C 0 ÷ 100 % RH
Output	Depending on the model: - Analog in µV/Wm ⁻² - Analog 4÷20 mA - Analog 0÷1 V, 0÷5 V or 0÷10 V - Double output: Analog 4÷20 mA + Digital RS485 Modbus-RTU - Digital RS485 Modbus-RTU - Digital SDI-12
Power supply	10÷30 Vdc (4÷20 mA - 0÷1 V - 0÷5 V outputs) 15÷30 Vdc (0÷10 V output) 5÷30 Vdc (RS485 Modbus-RTU) 7÷30 Vdc (SDI-12)
Consumption	< 200 µA for SDI-12 version
Connection	- 4-pole M12 connector for analog output models - 8-pole M12 connector for digital and double output models
Accuracy of levelling device	< 0.1°
Protection Degree	IP 67
MTBF	> 10 years

Dimensions

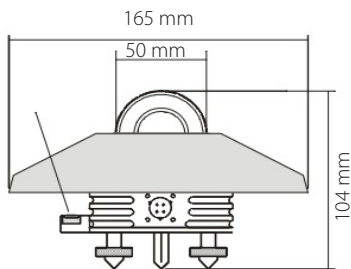

LPPYRA02 is also available in the version with shadow-ring (LPPYRA12). This measures the diffuse solar radiation eliminating the contribution of direct irradiance.



ISO 9060:2018 Technical Specifications

Classification	Spectrally Flat Class B	
Response time (95%)	< 10 s	
Zero offset	a) response to a 200 W/m ² thermal radiation	< ±10 W/m ²
	b) response to a 5 K/h change in ambient temperature	< ±4 W/m ²
	c) total zero off-set including the effects a), b) and other sources	< ±15 W/m ²
Long-term instability (1 year)	< ±1 %	
Non-linearity	< ±1 %	
Response according to the cosine law	< ±18 W/m ²	
Spectral error	< ±0.5 %	
Temperature response (-10...+40°C)	< 1.5 %	
Tilt response	< ±2 %	

Ordering Codes

LPPYRA02	<input type="checkbox"/> <input type="checkbox"/>	Blank = 0...2000 W/m ² 4 = 0...4000 W/m ² Only for AC - AV - ACS models.
----------	---------------------------------------------------	------------------------------------------------------------------------------------------------------

Blank = Analog in µV/Wm⁻²
AC = Analog 4÷20 mA
AV = Analog 0÷1 V, 0÷5 V or 0÷10 (to be defined when ordering)
ACS = Analog 4÷20 mA + digital Modbus-RTU
S = Digital RS485 Modbus-RTU
S12 = Digital SDI-12

All pyranometers are supplied with shade disk, cartridge for silica-gel crystals, 2 spare sachets, levelling device, Calibration Report.

Accessories

LPS1	Fixing bracket for mast Ø40÷50 mm.
LPRING02	Base with levelling device and adjustable holder.
LPRING04	Adjustable holder for mounting the pyranometer a Ø40 mm mast in an inclined position.
HD2003.79K	Kit to install the pyranometer on a transverse mast.
HD2003.85K	Kit with adjustable height to mount on a Ø40 mm mast.
LPS6	Installation kit including: 750 mm mast, base fitting, graduated support plate, bracket for pyranometers.
CPM12AA4.xx	Cable for LPPYRA02 / 02AC / 02AV models. M12 connector on one end, open wires on the other end (2, 5 or 10 m).
CPM12-8D.xx	Cable for LPPYRA02S / 02S12. M12 connector on one end, open wires on the other end (2, 5 or 10 m).
CPM12-8DA.xx	Cable for LPPYRA02ACS. M12 connector on one end, open wires on the other end (2, 5 or 10 m).
CP24	PC connecting cable for the RS485 MODBUS parameters configuration (only for models with RS485 output).

Delta OHM

Member of GHM GROUP

In order to ensure the quality of our instruments, we are constantly re-evaluating our products. Improvements can imply changes in specification; we advise you to always check our website for the newest version of our documentation.

We look forward to your enquiry:

Phone +39 049 89 77 150

Email: sales@deltaohm.com

Delta OHM S.r.l.

Single Member Company subject to direction and coordination of

GHM MESSTECHNIK GmbH

Via Marconi 5 | 35030 Caselle di Selvazzano (PD) | ITALY

Rev.1.3 - 03.21